




**SECTION C-C**  
**CAST OPEN LID**




**SECTION E-E**




**SECTION G-G**

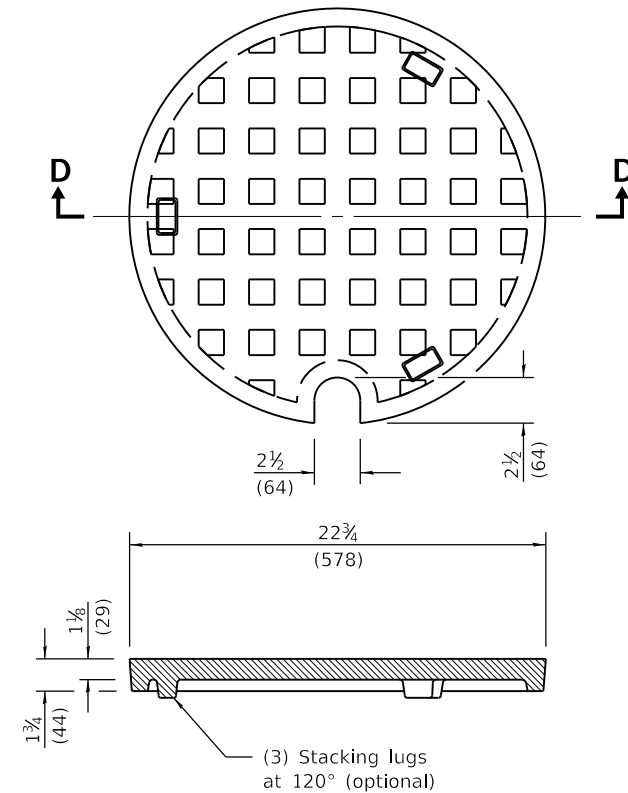


**SECTION D-D**  
**CAST CLOSED LID**  
Gray Iron

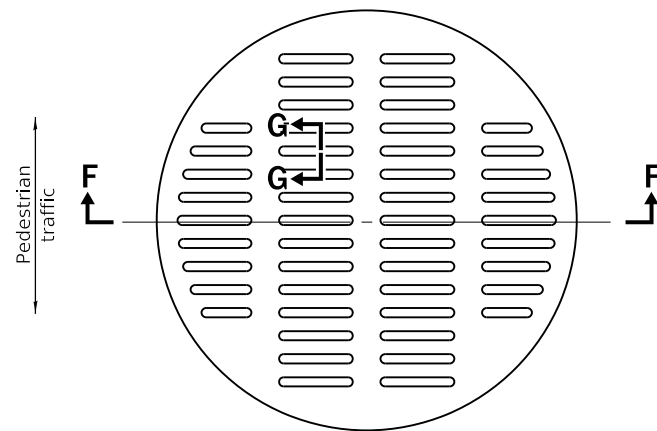

**SECTION F-F**  
**ADA COMPLIANT**  
**CAST OPEN LID**

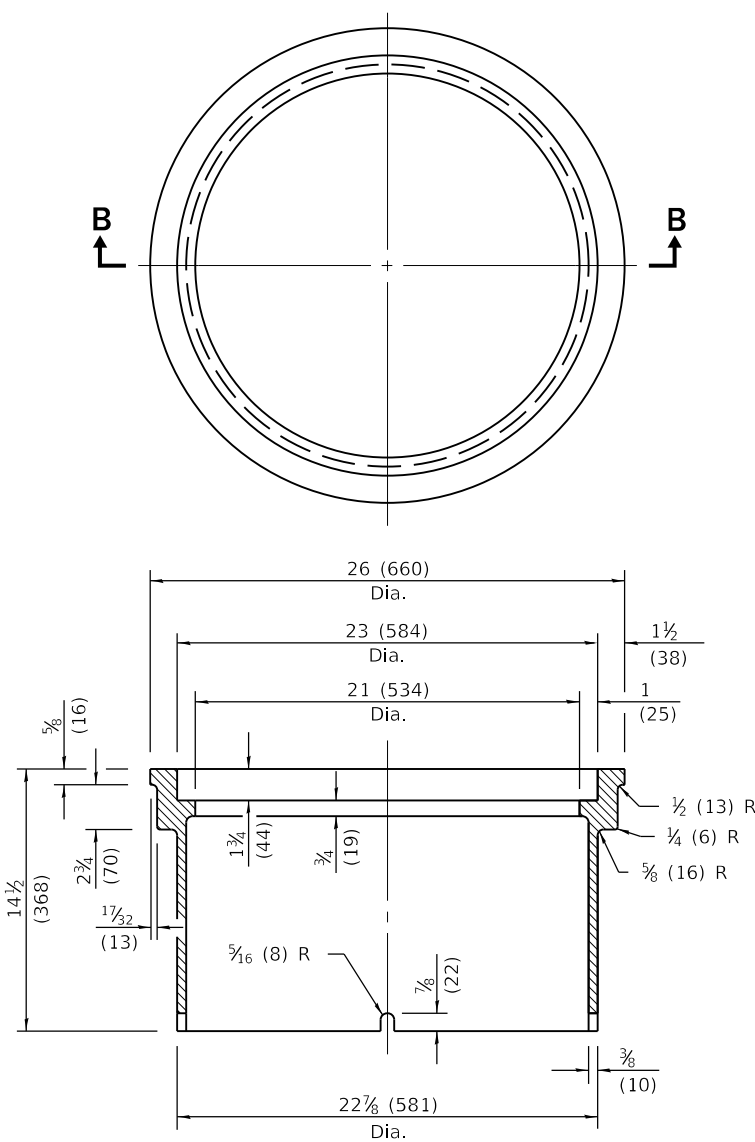


**SECTION B-B**  
**CAST FRAME**  
Gray Iron

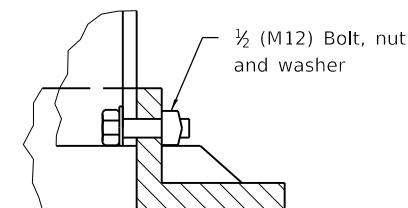

**DETAIL OF BOLTING**  
**FRAME TO BASE**

NOTE: Bolts shall be removed after pavement has been placed.

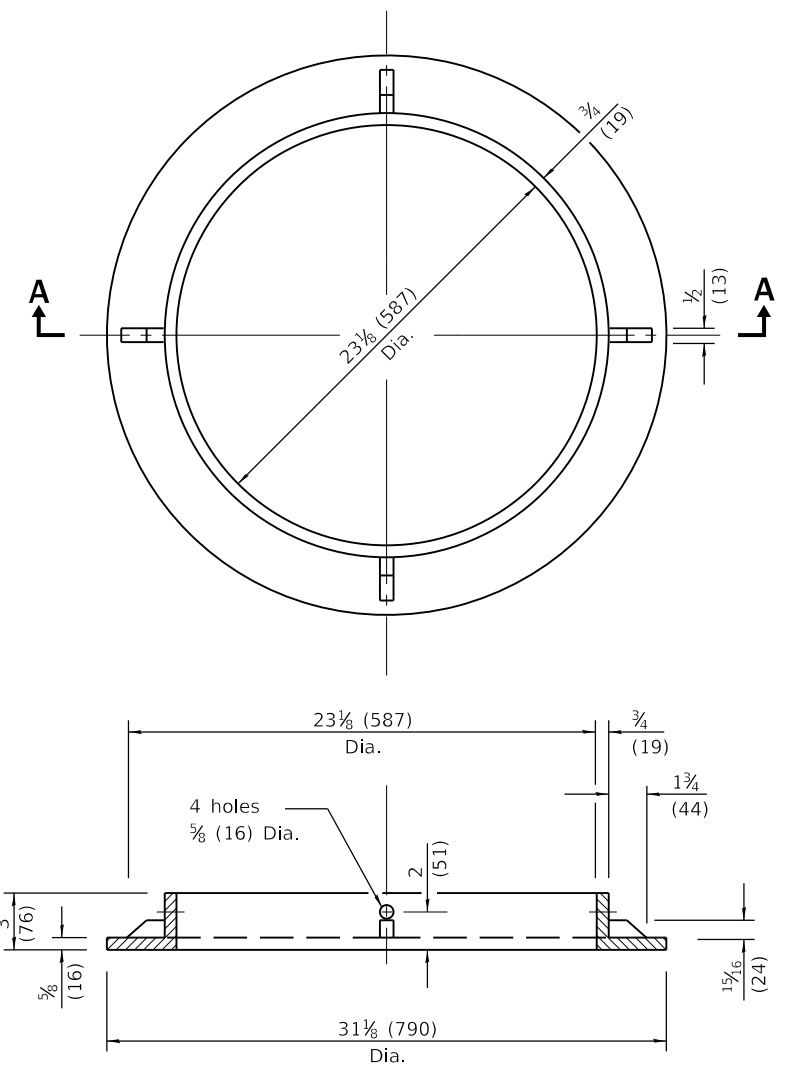

**SECTION A-A**  
**CAST BASE**  
Gray Iron

**GENERAL NOTES**

The four holes in the cast base may be rotated 45° from the position shown in section A-A

All dimensions are in inches (millimeters) unless otherwise shown.

DATE	REVISIONS
1-1-15	Added ADA compliant open lid.
1-1-09	Switched units to
	English (metric).

**BASE, FRAME AND**  
**LIDS TYPE 5**

**STANDARD 604021-03**